

# 352i ATC Cabinet

## Cabinets

Controllers

Signals

Signs

Software

Specialty



*Shown with 24-channel input assembly, 16-channel output assembly, and McCain ATC eX 2070 controller (sold separately).*

## Overview

The 352i ATC Cabinet is part of McCain's revolutionary ATC cabinet series which combines the best of rack mount and serial-based designs to meet the needs of today's LED intersections. Using smarter, high-density components, ATC cabinets offer unparalleled control capabilities for intersections that would otherwise require unorthodox wiring or even a second cabinet. Users rave about the drastically reduced assembly size that leaves ample room for auxiliary equipment, such as video detection and battery backup systems. With the most sold in the industry, our proven ATC Cabinets meet the needs of today's smart cities and are ready for tomorrow's challenges, including the future of connected and autonomous vehicles.

## Benefits

- Safeguard against accidental shock from inadvertent contact with high voltages
- Comply with leading standards on electrical safety, including NEC and NFPA 70E
- Detect a dark approach for increased driver safety
- Monitor FTR and flasher continuously to ensure operability
- Allow for hot swappable output assembly for improved intersection safety
- Upgrade existing installations - matches 332 Caltrans and ITS 342 cabinet footprints
- Connected vehicle ready

## Product Description


The McCain 352i ATC Cabinet's modern design and advanced safety features complement the operational capabilities of ATC controllers and aim to protect agency, personnel, and public interests. These unrivaled benefits include load current monitoring to detect a dark approach, no AC power exposed to reduce accidental contact with high voltages, and the ability to keep the intersection in flash while replacing the output assembly.

Each 352i ATC cabinet comes configured to meet individual needs using one or more input and output assemblies; in order to provide the necessary phasing, overlaps, and channels. The cabinet can manage up to 72 detector inputs and 32-channel outputs without any complex wiring.


Since the compact components take up half the space (48 input channels fit in the space of the 24 channel input assembly), even the largest configuration can easily fit in the cabinet's standard 332 shell.

# 352i ATC Cabinet


Front

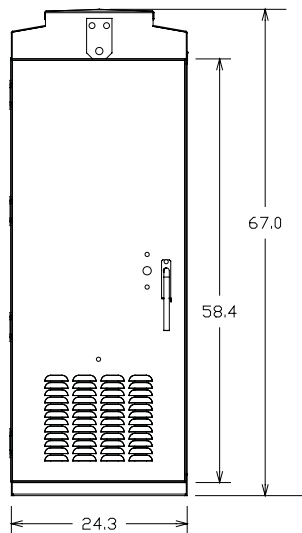

Side

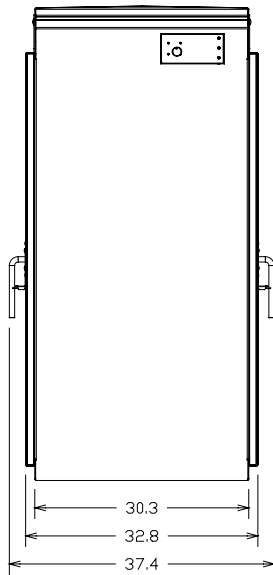

Base



Dimensions rounded to the nearest 0.1"

## Standard Features

- Field output termination assembly provides removable contact blocks for easy connections to field signal wires, sockets for flash transfer relays (FTRs), and flash program blocks (FPBs) for output channels
- All channels are flashable and programmable
- FPBs control and select the color (red, yellow, or dark) during flash
- Hermetically sealed high-density FTR features an LED indicator to visually confirm relay is operational and contacts have transferred
- Interior LED cabinet lights (2), front and back
- Model 2202 dual flasher/switch pack combination
- Exterior is continuously welded

## Assemblies & Components

- 24 or 48-channel input assembly
- 2 or 4-channel industry standard detection modules
- 48-channel detector, PPB, EVP, etc.
- 16 or 32-channel output assembly
- 32-channel CMU
- CMU auxiliary display unit
- Model 2216-24 cabinet power supply
- DC power / communication assembly
- Clean AC power assembly
- Police panel with On/Off, MCE, Auto/Flash, and Interval Advance push button cable
- Slide-out drawer for storing programming blocks, plans, etc.

## General Specifications

|                  |   |
|------------------|---|
| Dimensions:      | 67" H x 24" W x 30" D (rounded to the nearest inch)   |
| Material:        | 5052-H32 aluminum, 0.125" thick   |
| Finishes:        | Natural, anodized, or powder coated   |
| Doors:           | Front door (1), back doors (1), both full size  |
| Latching System: | 3-point, choice of Corbin or Best locks   |
| Handles:         | 3/4" round, stainless steel with padlock hasp   |
| Door Stops:      | 90° (±10°), each door, top<br>90° and 180° (±10°), each door, bottom                        |
| Rack Assembly:   | Removable 19" EIA rack  |
| Ventilation:     | Thermostatically controlled 100 CFM fans (2)<br>Louvered air intake in door, pleated filter |
| Mounting:        | Base mounted  |
| Shipping Weight: | 235 lbs without plug-ins or controller  |

## Options

- Fiber optic termination panel
- 3/4" x 16" anchor bolts for mounting (4)

To learn more about  
McCain's Integrated Traffic  
Solutions, please contact  
[info@mccain-inc.com](mailto:info@mccain-inc.com) or  
call (760) 727-8100



2365 OAK RIDGE WAY // VISTA, CALIFORNIA 92081 // USA // [WWW.MCCAIN-INC.COM](http://WWW.MCCAIN-INC.COM)

© 2018 McCain Inc. Updated 04/06/2018. McCain reserves the right to change product specifications without notice.  
For the most up-to-date information, please contact McCain.